

KX-DAi2K8116H3

16CH 5MP Mini 1U 1HDD Digital Video Recorder

Design and specifications are subject to change without notice. Pictures in the document are for reference only, and the actual product shall prevail.



- H.265+/H.265 dual-stream video compression.
- Supports Full-channel AI-Coding.
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs.
- Max 32 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth.
- Up to 8 channels video stream (analog channel) Perimeter Protection.
- Up to 16 channels video stream (analog channel) SMD Plus.
- Up to 2 channels video stream (analog channel) human face recognition.
- IoT & POS functionalities.



System	
Main Processor	Industrial-grade processor
Operating System	Embedded Linux
Operating Interface	Web; Local GUI
Perimeter Protection	
Perimeter Performance AI by Recorder (Number of Channels)	Advanced Model: 2 channels, 10 IVS for each channel General Model: 8 channels, 10 IVS for each channel
Face Detection	
Face Attributes	Gender; age group; glasses; expressions; face mask; beard
Face Detection Performance of AI by Recorder (Number of Channels)	2 channels (up to 12 face images/s each channel)
Face Recognition	
Face Database Capacity	Up to 10 face databases with 20,000 face images in total. Name, gender, birthday, address, certificate type, certificate No., countries & regions and state can be added to each face image


Camera Input	1. CVI: 4K@25/30 fps; 6 MP@20 fps; 5 MP@20 fps; 5 MP@25 fps; 4 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps; 720p@50/60 fps.2. TVI: 4K@15 fps; 5 MP@20 fps; 4 MP@25/30 fps; 3 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps.3. AHD: 4K@15 fps; 5 MP@20 fps; 4 MP@25/30 fps; 3 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps
IP Camera Input	Up to 32 channels of IPC access 16 IP channels by default + 16 channels (analog channels are converted to IP channels) incoming bandwidth: 128 Mbps, recording bandwidth: 128 Mbps and outgoing bandwidth: 128 Mbps *After IP channels are added beyond the existing channels, the AI Function (IVS, SMD, FACE) will be disabled.
Encoding Capacity	Main stream: 4K@(1fps-7fps); 6 MP@(1fps-10fps); 5 MP@(1fps-12fps); 4K-N, 4 MP, 3 MP@(1fps-15fps); 4M-N, 1080p, 720p, 960H, D1,CIF@(1fps-25/30fps); Sub stream: 960H@(1fps-15fps); D1/CIF@(1 fps-25/30fps)
Dual-stream	Yes
Video Bit Rate	32 kbps-6144 kbps
Audio Sampling	8 kHz, 16 bit
Audio Bit Rate	64 kbps
Video Output	1 HDMI, 1 VGA HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720

Network Port	1 (10/100/1000 Mbps Ethernet port, RJ-45)
General	
Power Supply	DC 12V, 3A
Power Consumption	<15 W (without HDD)
Net Weight	1.30 kg (2.87 lb)
Gross Weight	2.10 kg (4.63 lb)
Product Dimensions	325.0 mm × 257.1 mm × 55.0 mm (12.80" × 10.12" × 2.17") (W × D × H)
Packaging Dimensions	372.0 mm × 117.0 mm × 308.0 mm (14.65" × 4.61" × 12.13") (W × D × H)
Operating Temperature	-10 °C to +55 °C (14 °F to +131 °F)
Operating Humidity	10%–90% (RH)
Installation	Rack or desktop
Panels	

Face Recognition Performance of AI by Recorder (Number of Channels)	2 channels
SMD Plus	
SMD Plus by Recorder	16 channels: Secondary filtering for human and motor vehicle , reducing false alarms caused by leaves, rain and lighting condition change
Audio and Video	
Analog Camera Input	16 BNC ports, supports HDCVI/AHD/TVI/CVBS auto-detect

	VGA: 1920 × 1080, 1280 × 1024, 1280 × 720 *Simultaneous/heterogeneous video sources output for VGA and HDMI is configurable.
Multi-screen Display	When IP extension mode not enabled: 1/4/8/9/16 When IP extension mode enabled: 1/4/8/9/16/25/36
Third-party Camera Access	ONVIF; Panasonic; Sony; Axis; Arecont; Samsung
Compression Standard	
Video Compression	AI Coding; Smart H.265+; H.265; Smart H.264+; H.264
Audio Compression	G.711a; G.711u; PCM
Network	

Network Protocol	HTTP; HTTPS; TCP/IP; IPv4; RTSP; UDP; SMTP; NTP; DHCP; DNS; DDNS; P2P
Mobile Phone Access	IOS; Android
Interoperability	ONVIF 22.12(Profile T; Profile S; Profile G); CGI; SDK
Browser	Chrome, IE9 or later, Firefox
Network Mode	Single-address mode
Recording Playback	
Record Mode	General, motion detection; intelligent; alarm; POS
Recording Playback	1/4/9/16
Backup Method	USB device and network
Playback Mode	Instant playback, general playback, event playback, tag playback, smart playback (face and motion detection)
Alarm	
General Alarm	Motion detection; video loss; tampering
Anomaly Alarm	No disk; storage error; disk full; camera offline; IP conflict; MAC conflict
Intelligent Alarm	Face detection; face recognition; perimeter protection
Alarm Linkage	Record; snapshot (panoramic); IPC external alarm output; access controller; voice prompt; buzzer; log; preset; email
Ports	
Audio Input	1-channel RCA 16-channel BNC (Coaxial Audio)
Audio Output	1-channel RCA
Two-way Talk	Yes (share the same audio input with the first channel)
HDD Interface	1 SATA port, up to 16TB capacity for each disk. The maximum HDD capacity varies with environment temperature.
RS-485	1 port, for PTZ control
USB	2 (1 front USB 2.0 port, 1 rear USB 3.0 port)
HDMI	1
VGA	1

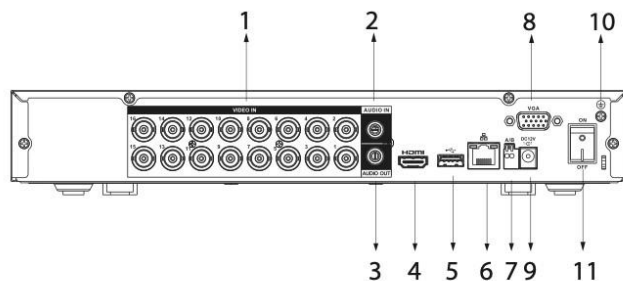

- | | |
|----------------------------|---------------------------|
| 1 VIDEO IN | 2 AUDIO IN, RCA Connector |
| 3 AUDIO OUT, RCA Connector | 4 HDMI Port |
| 5 USB Port | 6 Network Port |
| 7 RS-485 Port | 8 VGA Port |
| 9 Power Input | 10 Ground |
| 11 Power Switch | |

KB VISION

KX-DAi2K8116H3

16CH 5MP Mini 1U 1HDD Digital Video Recorder

Design and specifications are subject to change without notice. Pictures in the document are for reference only, and the actual product shall prevail.

www.kbvisiongroup.com