

# EN-NVR8538AI

64CH 3U 16HDDs WizMind Network Video Recorder



WizMind

Launched by Dahua Technology, Dahua WizMind is a full portfolio of solutions composed of project-oriented products including IPC, IVSS, NVR, PTZ, XVR, Thermal and software platform which adopts industry-leading deep learning algorithms. Focusing on customer's requirements, WizMind provides precise, reliable and comprehensive AI solutions for verticals.

## Security

Audio/Video Encrypted Transmission (Private Protocol, RTSP over TLS); Trusted Protection (Trusted Update, Trusted Boot, Trusted Execute); Security Warning (Security Exception, Invalid Access); Attack Defense (Firewall, Account Lockout, Anti-DoS Attack); Firmware Encryption; 802.1x; Secure Shell; Configuration Files Security (Encrypted Storage of Configuration, Encrypted Exporting of Configuration); CA Certificate; Log Security; Session Security (Auto Logout after Timeout, Brute-force Access Prevention, Anti-hijacking)

## Functions

### AcuPick

This industry-leading search technology effectively utilizes both front-end and back-end intelligence to help with searching through massive video data to quickly and conveniently locate targets with greater precision.

### Perimeter Protection

Automatically filters out false alarms caused by animals, rustling leaves, bright lights, etc. Enables system to act secondary recognition for the targets. Improves alarm accuracy.

### Face Recognition

Dahua Face Recognition technology extracts the features of captured faces and compares them with that in face database.

- Supports Smart H.265+, H.265, Smart H.264+, H.264 and MJPEG decoding formats.
- Max. decoding capability: 32 × 1080p@30 fps.
- Max. 1280/1280/1024 Mbps incoming/recording/outgoing bandwidth.
- Supports AcuPick with up to 64 channels.
- AI by Recorder supports 8-channel face detection and recognition, up to 40 face databases and 300,000 face images; 8-channel metadata; 32-channel perimeter protection; 32-channel SMD Plus.
- AI by Camera supports face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting.
- Supports redundant power, N+M cluster, Raid 0/1/5/6/10, ISCSI, Drawer-like chassis design allows for HDD hot swapping.
- Support 64 user
- Supports EPTZ, One-click Arming & Disarming.
- Security baseline 2.3.



## Video Metadata

With deep learning algorithm, Dahua Video Metadata technology can detect, track, capture vehicle, non-motor vehicle and people, and select the best images, and extract attributes.

## Heat Map by Camera

Dahua heat map technology is used to display the crowd density and people appearance probability. Export and display the crowd status by different colors. Generally, the crowd status is the statistics of people quantity in space and time dimensions.

## ANPR by Camera

With deep learning algorithm, Dahua ANPR technology can recognize the number plate information of vehicles in the image with ANPR cameras. Support blacklist/allowlist mode, searching target vehicles from recorded video.

## SMD Plus

With intelligent algorithm, Dahua Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

## Scene

Suitable for large public areas such as supermarket, schools, industrial parks and bus stations.

## Technical Specification

### System

Main Processor	Industrial-grade processor
Operating System	Embedded Linux
Operating Interface	Web, Local GUI

### AI

AI by Recorder	Face detection; face recognition; video metadata (human, motor vehicles, and non-motor vehicles); perimeter protection; SMD Plus
AI by Camera	Face detection; face recognition; video metadata (human, motor vehicles, and non-motor vehicles); perimeter protection; SMD; stereo analysis, crowd distribution; people counting; ANPR; heat map; PPE detection
AcuPick AI by Camera + Recorder	Max. 64-channel, 1 combined event per channel

### Perimeter Protection

Perimeter Performance AI by Recorder (Number of Channels)	Simultaneous mode: 32 channels, 10 IVS rules for each channel Heterogeneous mode: 24 channels, 10 IVS rules for each channel Refer to the information on video output for details on the mode
Perimeter Performance of AI by Camera (Number of Channels)	All channels (64 targets/s)

### Face Detection

Face Attributes	6 attributes
Face Detection Performance of AI by Recorder (Number of Channels)	Simultaneous mode: 8 channels (up to 12 face images/s each channel) Heterogeneous mode: 5 channels (up to 12 face images/s each channel) Refer to the information on video output for details on the mode
Face Detection Performance of AI by Camera (Number of Channels)	64 channels

### Face Recognition

Face Database Capacity	Up to 40 face databases with 300,000 images, with a total capacity of 48 G.
Face Recognition Performance of AI by Recorder (Number of Channels)	Simultaneous mode: 32-channel FD (by camera) + FR (by recorder), image stream: 32 face images/s; 8-channel FD (by recorder) + FR (by recorder), video stream: 16 face images/s Heterogeneous mode: 16-channel FD (by camera) + FR (by recorder), image stream: 16 face images/s; 5-channel FD (by recorder) + FR (by recorder), video stream: 10 face images/s Refer to the information on video output for details on the mode
Face Recognition Performance of AI by Camera (Number of Channels)	64 channels

### SMD Plus

SMD Plus by Recorder	32 channels: Secondary filtering for human and motor vehicle, reducing false alarms caused by leaves, rain and lighting condition change
SMD Plus by Camera	All channels (128 targets/s)

### Video Metadata

Metadata Performance of AI by Recorder (Number of Channels)	8 channels, 23 attributes extraction.
Metadata Performance of AI by Camera (Number of Channels)	64 channels
People Attributes	9 human body attributes
Motor Vehicle Attributes	9 attributes
Non-motor Vehicle Attributes	4 attributes

### Vehicle License Plate Comparison

ANPR by Camera (Number of Channels)	All channels (64 targets/s)
License Plate Database Capacity	1. Up to 20,000 plate numbers. 2. Blocklist and allowlist

### Audio and Video

Access Channel	64 channels
Network Bandwidth	AI disabled: 1280 Mbps incoming, 1280 Mbps recording and 1024 Mbps outgoing AI enabled: 640 Mbps incoming, 640 Mbps recording and 512 Mbps outgoing
Resolution	32 MP; 24 MP; 16 MP; 12 MP; 8 MP; 6 MP; 5 MP; 4 MP; 3 MP; 1080p; 960p; 720p; D1; CIF
Decoding Capability	AI disabled: 2-channel 32 MP@30 fps; 2-channel 24 MP@30 fps; 4-channel 16 MP@30 fps; 5-channel 12 MP@30 fps; 8-channel 8 MP@30 fps; 11-channel 6 MP@30 fps; 12-channel 5 MP@30 fps; 16-channel 4 MP@30 fps; 32-channel 1080p@30 fps ; 128-channel D1@30 fps AI enabled: 1-channel 32 MP@30 fps; 1-channel 24 MP@30 fps; 2-channel 16 MP@30 fps; 2-channel 12 MP@30 fps; 4-channel 8 MP@30 fps; 5-channel 6 MP@30 fps; 6-channel 5 MP@30 fps; 8-channel 4 MP@30 fps; 16-channel 1080p@30 fps ; 80-channel D1@30 fps
Video Output	2 VGA, 4 HDMI; VGA: 1920 × 1080, 1280 × 1024, 1280 × 720; HDMI1&2: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720; HDMI3: 7680 × 4320, 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720; HDMI4: 1920 × 1080, 1280 × 1024, 1280 × 720 Simultaneous mode (simultaneously outputs video sources for all the HDMI1-4 and VGA1-2 ports) Max. resolution of VGA1 and VGA2 is 1080p; max. resolution of HDMI1 and HDMI2 is 4K; max. resolution of HDMI3 is 8K; max. resolution of HDMI4 is 1080p Heterogeneous mode (simultaneously outputs video sources for the VGA1 and HDMI1, or VGA2 and HDMI2. It also outputs heterogeneous video sources for HDMI1–4) Max. resolution of VGA1 and VGA2 is 1080p; max. resolution of HDMI1, HDMI2 and HDMI3 is 4K; max. resolution of HDMI4 is 1080p

Multi-screen Display	Main Screen: 1/4/8/9/16/25/36/64 Sub Screen: 1/4/8/9/16/25/36
Third-party Camera Access	ONVIF; Panasonic; Sony; Axis; Arecont; Pelco; Canon; Hanwha

### Compression Standard

Video Compression	Smart H.265+; H.265; Smart H.264+; H.264
Audio Compression	G.711a; G.711u; PCM; G726

### Network

Network Protocol	HTTP; HTTPS; TCP/IP; IPv4; IPv6; UDP; SNMP; NTP; DHCP; DNS; SMTP; UPnP; IP Filter; PPPoE; FTP; DDNS; Alarm Server; IP Search (Supports IP camera, DVR, NVS, etc.); Multicast; P2P; Auto Registration; iSCSI
Mobile Phone Access	iOS; Android
Interoperability	ONVIF 22.06(Profile T; Profile S; Profile G); CGI; SDK
Browser	Chrome; IE; Safari; Edge; Firefox
Network Mode	Multi-address; load balance; fault tolerance

### Recording Playback

Multi-channel Playback	Up to 16 channels
Record Mode	General, motion detection; intelligent; alarm; POS
Backup Method	USB device and network
Playback Mode	Instant playback; general playback; event playback; tag playback; smart playback

### Storage

Disk Group	Yes
RAID	RAID 0/1/5/6/10
Hot Swapping	Yes

### Alarm

General Alarm	Motion detection; local alarm; alarm box; camera external alarm; network alarm; scene changing; PIR alarm; thermal alarm
Anomaly Alarm	Error (no disk, disk error, low space, RAID exception, low quota space; abnormal disk health; network disconnection; IP conflict; MAC conflict; abnormal fan speed); video loss; video tampering; camera offline; audio detection
Intelligent Alarm	Face detection; face and body detection; face recognition; perimeter protection; SMD; video metadata; stereo analysis, crowd distribution; ; ANPR; heat map
Alarm Linkage	Record; snapshot (panoramic); local alarm output; IPC external alarm output; access controller; audio; buzzer; log, preset; email

### Port

Audio Input	1-channel RCA
Audio Output	2-channel RCA
Alarm Input	32 channels
Alarm Output	16 channels

Disk Interface	16 SATA ports, each disk can contain up to 20 TB. This limit varies depending on the environment temperature.
eSATA	1
RS-232	1
RS-485	2 (1 port for half-duplex serial communication, 1 port for full-duplex serial communication)
USB	4 (2 front USB 2.0 ports, 2 rear USB 3.0 ports)
HDMI	4
VGA	2
Network Port	4 (10/100/2500 Mbps Ethernet port, RJ-45)



### General

Power Supply	100–240 VAC, 50±2% Hz
Redundant Power	Yes
Power Consumption	<25 W (without HDD)
Net Weight	13.03 kg (28.73 lb)
Gross Weight	15.42 kg (34.01 lb)
Product Dimensions	485.0 mm × 529.0 mm × 133.2 mm (19.09" × 20.83" × 5.24") (W × D × H)
Packaging Dimensions	634.0 mm × 709.0 mm × 429.0 mm (24.96" × 27.91" × 16.89") (W × D × H)
Operating Temperature	–10 °C to +55 °C (14 °F to +131 °F)
Storage Temperature	–20 °C to +60 °C (–4 °F to +140 °F)
Operating Humidity	10%–93% (RH), non-condensing
Installation	Rack or desktop
Certifications	Class A CE-EMC: EN 55032:2015+A1:2020; EN IEC 61000-3-2:2019+A1:2021; EN 61000-3-3:2013+A1:2019+A2:2021; EN 55035:2017+A11:2020; EN 50130-4:2011+A1:2014 CE-LVD: EN 62368-1:2014

### Ordering Information

Type	Model	Description
AI Network Video Recorder	EN-NVR8538AI	64CH 3U 16HDDs WizMind Network Video Recorder

**Dimensions (mm[inch])**

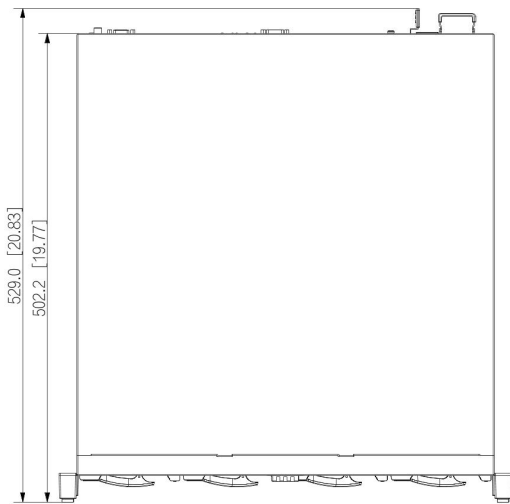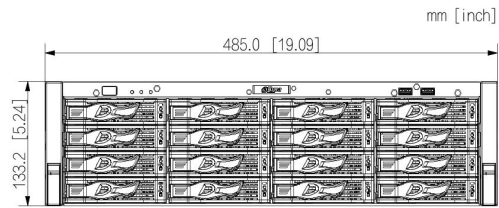

**Panels**

